


Folding Gates

Product Guide



Product Web Page
http://huskyrackandwire.com/products_

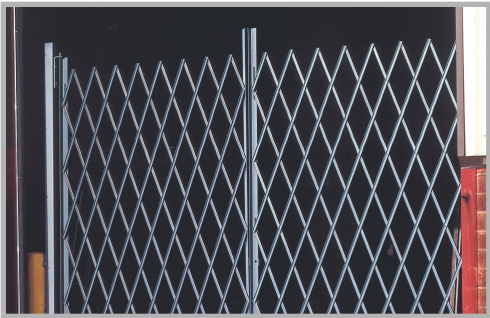

Steel Folding Gates


Ventilation
 •
 Visibility
 •
 Access Control



Standard Pin Type Mount with "L" Bracket holds top of gate to wall



"L" Brackets allow gates to be installed on surface or recess. Extended brackets facilitate installing inside of overhead door tracks.

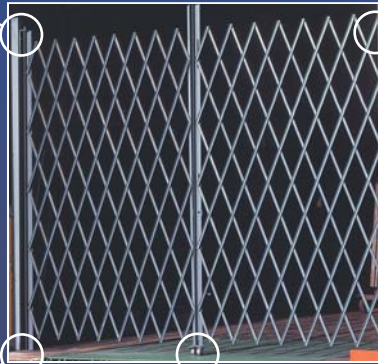

SECURE
 Receiving Doors
 •
 Lift-Up Door
 •
 Entrancesways
 •
 Hallway



Bottom Mount is the lower pin inserted through a bearing washer into a 1/2" x 2" hole drilled into the floor



The Drop Pin slips into the same size hole and is secured by a gusset angle on opposite gate rail.

CALL FOR DEALER DISCOUNT

| SINGLE GATE | | | | DOUBLE GATE | | | |
|-------------|--------|-------|--------|-------------|--------|-------|--------|
| Wireway # | Height | Width | Weight | Wireway # | Height | Width | Weight |
| 600650 | 5.0 | 5.5 | 49.28 | 620465 | 6.5 | 8.0 | 81.14 |
| 600665 | 6.5 | 5.5 | 60.35 | 620480 | 8.0 | 8.0 | 100.00 |
| 600670 | 7.0 | 5.5 | 65.59 | 620565 | 6.5 | 10.0 | 96.35 |
| 600680 | 8.0 | 5.5 | 73.54 | 620580 | 8.0 | 10.0 | 118.97 |
| 600765 | 6.5 | 6.5 | 64.15 | 620665 | 6.5 | 12.0 | 111.57 |
| 600770 | 7.0 | 6.5 | 69.60 | 620680 | 8.0 | 12.0 | 137.95 |
| 600780 | 8.0 | 6.5 | 78.29 | 620765 | 6.5 | 14.0 | 126.78 |
| 600865 | 6.5 | 7.5 | 67.96 | 620780 | 8.0 | 14.0 | 147.44 |
| 600870 | 7.0 | 7.5 | 73.76 | 620865 | 6.5 | 16.0 | 134.38 |
| 600880 | 8.0 | 7.5 | 83.03 | 620880 | 8.0 | 16.0 | 166.42 |



Available in 48 hours Guaranteed

Information subject to change.
 See website for more information.

**Call 800-438-5629 or visit
 www.huskyrack.com**

Wireway Husky Corp. • 6146 Denver Industrial Park Circle • Denver, NC 28037
 Phone 704-483-1900 • Fax 704-483-1911 • productinfo@wirewayhusky.com
 © 2008, Wireway Husky Corp. All Rights Reserved.