

Velox MACHINE GUARDING

PLANT SAFETY




HUSKY
RACK & WIRE™

Velox

Guarding applications


- ▶ Protect workers and visitors from entering dangerous areas.
- ▶ Complete 6'- and 8'-high systems are available in our 48-hour Quick Ship program.
- ▶ Velox guarding meets all ISO10218, R15.06-2012, CSAZ434, and OSHA 29 CFR 1910 standards.
- ▶ Panels are 2" x 2" x 8-gauge welded wire with reinforcing flutes for extra strength.
- ▶ Twelve panel widths are in stock from 6" - 94".
- ▶ Swing doors and slide doors are in stock and ready to ship.
- ▶ Guarding systems are painted with our high-quality powder paint.

Cut-to-fit panel for in-the-field customization

Stock panels can be shortened in width by using a XGBC Kit, which contains bolt-on clips to replace the standard welded clips. To shorten in height, use a XGBC-NF clip.


1

Cut the panel to remove the excess width. Panels can be cut with 2" adjustability.

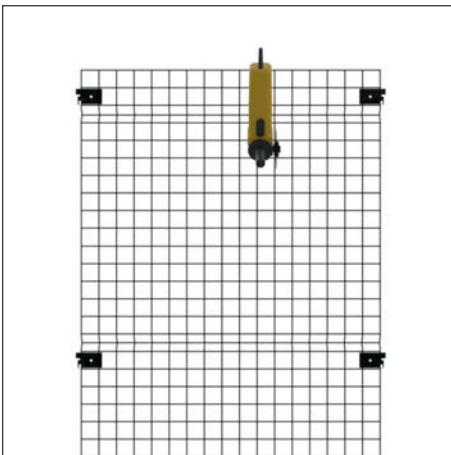

2


Replace the welded clip with the two-piece bolt-on clip.

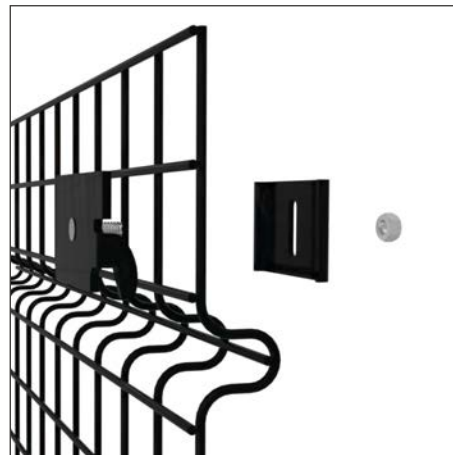

3

Install custom panel width.



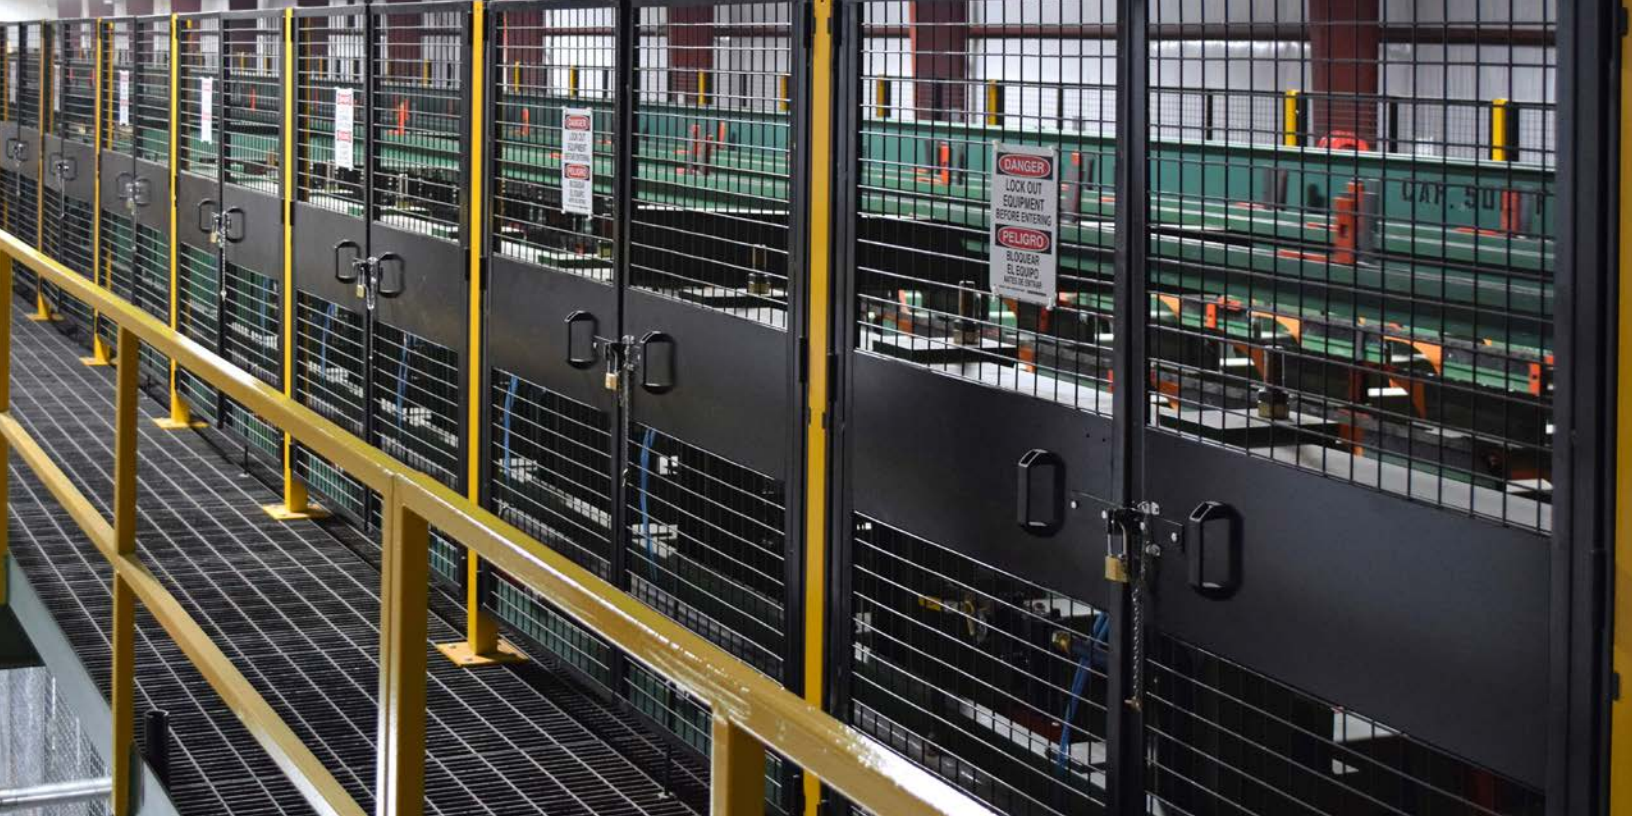

Versatility and accessibility


Velox guarding system makes it easy to rearrange, access or expand enclosures.

With a wide variety of doors available, access for maintenance is easy.

Pre-welded clips

Velox guarding panels have captive fasteners — no loose nuts or bolts to worry about.

Panels install quickly and easily in pre-punched posts.

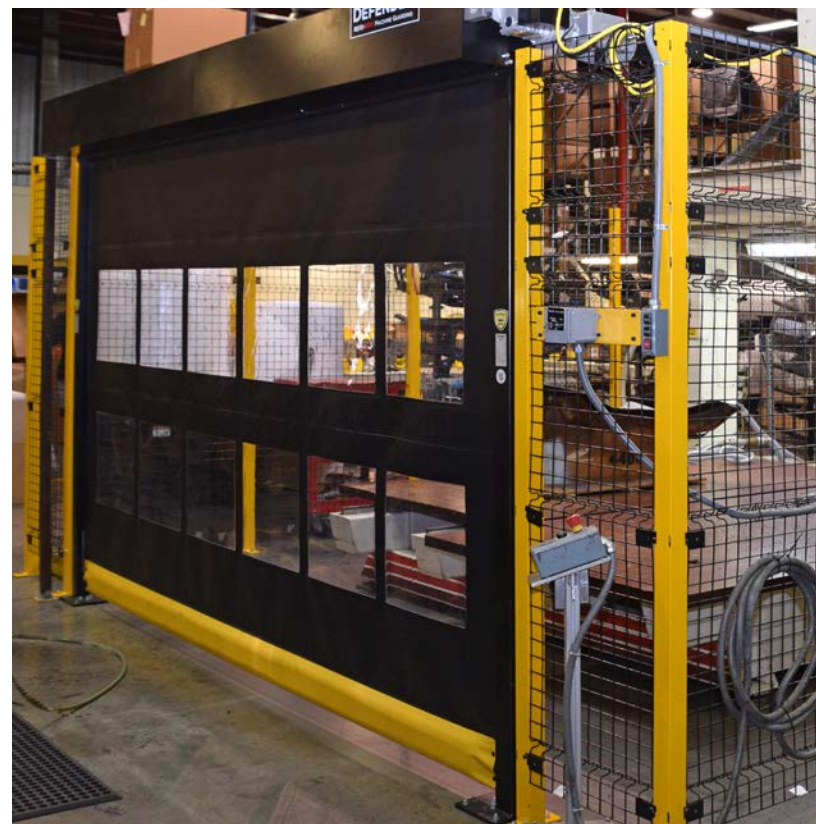



6146 Denver Industrial Park Road
Denver, NC 28037
704-483-1900

getvelox.com

Velox is manufactured by Husky Rack & Wire, 1041 Airlie Parkway, Denver NC 28037.
Please visit our website for more information on this product: www.getvelox.com

Velox Guarding Components

Panels

Our standard stock panels are 66" tall to accommodate 6' high systems, which is the most popular, OSHA compliant height. If you require an 8' high system, the same 66" panels are used with an additional 24" panel stacked above.

Panels are painted black with our high-quality powder paint.

Patented clips are welded to the perimeter of the panel for easy installation.

8-gauge, 2" x 2" welded wire mesh panels have a clear opening 1.84" between the wires.

Panels can be easily modified in the field for custom widths.

Posts

Heavy-duty, 16-gauge, 2 1/2" square posts are available in stock heights of 6' and 8'.

Posts are painted safety yellow with our high-quality powder paint.

Posts are pre-punched for mounting panels, doors and hardware.

We include necessary hardware in individually wrapped and labeled bags.

Doors

Doors are constructed of 2" x 2" welded mesh framed with 14-gauge angle. At the center of the doors, a heavy-duty plate is welded for rigidity and for mounting standard locks, latches or interlocks.

A wide variety of doors are available. We include the necessary hardware to install the doors in individually wrapped and labeled bags.

Doors are painted black with our high-quality powder paint.

Single swing doors are available in 3' or 4' widths with options of hinge left or right and swing in or out. Double swing doors in 6' or 8' widths are available when a larger opening is required.

Slide doors are available in 3', 4' or 5' widths and double slide doors are available in 6' and 8' widths. They are used when an unobstructed opening is required for forklifts, cranes or any other equipment to move in and out.

For special applications, contact HR&W Engineering or your distributor.

Husky Rack & Wire makes continuous improvements in all its products.
We reserve the right to change specifications without notice. Photos and illustrations may contain standard and optional equipment.

Warranty Information

For warranty information applicable to all our products, refer to the Husky Rack & Wire Terms and Conditions of Sale, which are accessible at www.huskyrackandwire.com/terms-conditions

© Wireway/Husky Corp. d/b/a Husky Rack & Wire. All Rights Reserved.

Velox